



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : H04L 12/14, H04Q 7/34 // H04M 15/00		A1	(11) International Publication Number: WO 00/24161
			(43) International Publication Date: 27 April 2000 (27.04.00)
(21) International Application Number: PCT/FI99/00858 (22) International Filing Date: 18 October 1999 (18.10.99) (30) Priority Data: 982263 19 October 1998 (19.10.98) FI 982748 18 December 1998 (18.12.98) FI (71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventor; and (75) Inventor/Applicant (for US only): WALLENIOUS, Jukka [FI/FI]; Keinutie 8 G 41, FIN-00940 Helsinki (FI). (74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: CHARGING METHOD IN TELECOMMUNICATIONS NETWORK			
(57) Abstract A method and system for charging a subscriber (10) in a telecommunications network comprising nodes (11 and 12) connected to a mediator unit (14), whereby a billing unit (15) comprising the subscriber's (10) charging data can be located outside the network used, preferably in the subscriber's (10) home network, in a subscriber identity module (SIM) or behind an open service architecture (OSA) associated with the network, the method comprising the following steps of: noting in the nodes (11 and 12) the event data related to the services used by the subscriber (10) and reporting the event data to the mediator unit (14), the event data being converted substantially in real time in the mediator unit (14) by applying the network charging algorithms to provide a charging data format understandable to the billing unit (15), expressed preferably as an amount of money spent or as charging pulses, for the updating of the subscriber's (10) charging data between the mediator unit (14) and the billing unit (15).			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

CHARGING METHOD IN TELECOMMUNICATIONS NETWORK

BACKGROUND OF THE INVENTION

The invention relates to charging in a telecommunications network and particularly to real-time charging of prepaid services.

5 The GPRS (General Packet Radio Service) is a new service in the GSM system and one of the objects of the standardization work in the GSM phase 2+ at the ETSI (European Telecommunication Standard Institute). The GPRS operational environment comprises one or more subnetwork service areas interconnected by a GPRS Backbone Network. A subnetwork comprises
10 a number of packet data service nodes, referred to as GPRS support nodes, each of which is connected to the GSM mobile network in such a way that it can provide a packet service for mobile data terminals via several base stations, i.e. cells. The intermediate mobile communications network provides circuit-switched or packet-switched data transmission between a support node
15 and mobile data terminals. Different subnetworks are in turn connected to an external data network, to a public switched packet data network PSPDN, for example. The GPRS service thus allows packet data transmission to be provided between mobile data terminals and external data networks, with the GSM network serving as an access network.

20 In the GPRS system, charging is based on a plural number of charging records CDR generated at the support nodes, the records being transmitted to a charging gateway functionality CGF. From the data it receives, the charging gateway functionality filters the charging data and transmits the filtered charging records CDR to a billing system that generates the actual
25 charging data. A problem with the above described arrangement is that the generating of the charging data is relatively slow. In particular, when a subscriber uses what are known as prepaid services, charging should take place substantially in real-time to avoid a situation where the subscriber could continue to use the prepaid service even though the amount paid in advance
30 by the subscriber had already been exhausted. One solution to the problem is to send the filtered charging data directly from the charging gateway functionality to the billing unit. The term 'billing unit' in this context refers generally to a functional unit that maintains the subscriber's charging data, or account data, and also comprises, for example, information about the advance
35 payments made by the subscriber for the prepaid services. Alternatively, also

data about the GPRS context events could be sent from the support nodes to the billing unit, charging being then based on the context events. In the above cases, problems arise, on one hand, from the complexity and amount of data received from the support nodes and, on the other hand, from network-specific charging methods that may differ from one another. Charging can be based, for example, on the duration of the service, on the amount of data to be transferred, or on other similar criteria. If the subscriber uses a foreign network, the billing unit must know the charging algorithms of the network concerned; this renders the billing unit configuration complex. Similar problems can also arise in a circuit-switched network, such as the GSM network, and in broadband networks. In the GSM system, for example, different events taking place during a call can have a different impact on charging, depending on the operator, or they may have no impact at all. Such events include quality of service changes, transmission rate changes, location changes, temporary entry into a shadow region, temporary cutting off of the subscriber connection, and changes during an ongoing call in the services used.

BRIEF DESCRIPTION OF THE INVENTION

An object of the invention is therefore to provide a method and a system implementing the method in such a way that the above problems can be solved. The objects of the inventions are achieved with a method and system characterized by what is stated in the independent claims 1 and 11. The preferred embodiments of the invention are disclosed in the dependent claims.

The invention is based on the idea of providing telecommunications network nodes with a function that converts event data or charging data received from the nodes, by applying the network charging algorithms, to provide a real-time, unambiguous charging data format understandable to the subscriber's billing unit, expressed as an amount of money spent or as charging pulses, for example. A node in this context refers to a network element, such as a packet network support node GSN or a mobile services switching centre MSC, that provides event data having an impact on charging. Unambiguity means that the charging data are structurally identical in the different telecommunications networks, irrespective of the internal charging algorithms of the networks. The unambiguous charging data are further transmitted to the subscriber's billing unit that maintains in real-time the

subscriber's charging data. The function associated with the network nodes can also negotiate with the subscriber's billing unit about charging; for example, the billing unit provides a predetermined amount of the prepaid sum for use to the function associated with the nodes of the network used and
5 when the amount is exhausted, the function can request an additional payment for use.

The method and system of the invention provide the advantage that the subscriber's charging data can be updated in a real-time process, thus allowing prepaid services to be used. In addition, the invention allows this
10 irrespective of the network used, the charging data of a visiting subscriber thus being also updated substantially in real-time in the home network or a subscriber identity module, for example. The billing unit only needs to know one common charging data structure; each function integrated into the support nodes of a telecommunications network knows the corresponding charging
15 algorithm of the network. Another advantage of the invention is the possibility to optimize the amount of signalling related to the charging data because data on all separate events having an impact on the call rate do not need to be transmitted all the way to the billing unit.

BRIEF DESCRIPTION OF THE DRAWINGS

20 In the following the invention will be described in greater detail in connection with preferred embodiments and with reference to the accompanying drawings, in which

Figure 1 is a block diagram illustrating a system of the invention for carrying out charging in a packet-switched telecommunications network according to a preferred embodiment, and
25

Figure 2 is a block diagram illustrating a system of the invention for carrying out charging in a circuit-switched telecommunications network according to a preferred embodiment.

DETAILED DESCRIPTION OF THE INVENTION

30 Although the use of the invention will be described below with reference to the GPRS and GSM systems, the description does not in any way restrict the application of the invention in other telecommunications networks.

Figure 1 illustrates a typical arrangement in a GPRS network. It is to be understood, however, that the Figure only shows components relevant to
35 the invention. The architecture of GPRS networks is not as mature as that of

the GSM networks. All GPRS terms should therefore be understood as being descriptive rather than limiting. The arrangement in the Figure comprises a separate Serving GPRS Support Node (SGSN) 11 of the GPRS. The support node 11 controls certain operations of the packet radio service on the network side. The operations include logging on and off the system by subscribers 10, routing area updates of the subscribers 10, and data packet routing to correct destinations.

The intermediate mobile network (not shown) provides packet-switched data transmission 31 between the support node 11 and the mobile subscribers 10. Different sub-networks, in turn, are connected 33 to an external data network 13, such as the Internet, via a specific Gateway GPRS Support Node GGSN 12. Packet data transmission between the mobile subscriber 10 and the external data networks 13 is thus accomplished by means of the GPRS service, with the GSM network functioning as an access network. The GGSN comprises, for example, routing information of GPRS subscribers, i.e. SGSN addresses and charging data. The SGSN and GGSN functionalities can be integrated into one and the same physical node.

The GPRS network of Figure 1 comprises one serving GPRS support node SGSN (11) and one GPRS gateway support node GGSN (12). The different support nodes SGSN (11) and GGSN (12) are interconnected 32 via an intra-operator backbone network. It is to be understood that a GPRS network may comprise any number of support nodes 11 and gateway support nodes 12.

Each support node 11 manages a packet data service in the area of one or more cells in a cellular packet radio network. To achieve this, each support node 11 is connected to a certain local part of the GSM system (not shown in Figure 1), typically to a mobile services switching centre, but in some situations it may be preferable to connect it directly to a base station subsystem BSS, i.e. to a base station controller BSC or a base station BTS. A subscriber 10 in a cell communicates with a base station BTS over a radio interface and further through the mobile network with the support node 11 to the service area of which the cell belongs. In principle, the mobile network between the support node 11 and the subscriber 10 only transmits 31 packets between these two. For this purpose, the mobile network can offer either a circuit-switched connection or packet-switched data packet transmission between the subscriber 10 and the serving support node 11. It should be

noted, however, that the mobile network only provides a physical connection between the subscriber 10 and the support node 11, and that its exact operation and structure are not relevant to the invention. The connection 31 between the subscriber 10 and the support node 11 can also be a fixed one.

5 An intelligent network IN is a network architecture connected to the basic network (the GPRS, for example), enabling faster, easier and more flexible service implementation and service control. This is performed by transferring the service control from the telephone exchange to a separate functional unit of the intelligent network. The services thus become
10 independent of the basic network operation, and the basic network structure and software do not have to be changed when services are altered or added. In addition to the actual network operator, an intelligent network may comprise several service providers.

 In fixed networks, intelligent network standardization has
15 progressed rapidly in recent years. These standards define a certain functional and hierarchical model for the intelligent network. In the intelligent network model, service control has been transferred from the exchange of the basic network to a service control point (SCP) in the intelligent network. The SCP comprises the required database and service logic programs (SLP), in other
20 words the software to provide the logic structure of a particular service (service logic), i.e. the service control point SCP provides a service control function (SCF). A service switching point (SSP) is an exchange, for instance a basic network exchange providing the service switching function (SSF), in other words the identification of the intelligence network service and the triggering of
25 interaction with the service control point (SCP). For example, when a call associated with an intelligent network service is set up, the service switching point SSP takes care of establishing the connection. To provide the intelligent network service, the service switching point SSP inquires instructions of the service control point SCP when encountering detection points associated with
30 intelligent network services. In other words, the service switching point SSP transfers the control to the SCP and remains waiting for the SCP's operations. When the intelligent network service is triggered, a service logic program SLP is initiated at the service control point SCP, the operation of the program determining the instructions the SCP sends to the SSP at each call stage. The
35 SSP interprets the instructions it receives and initiates the required call control operations. In other words, the triggering of an intelligent network service

means that an intelligent network service function is initiated by the impact of an impulse caused when a specific identification requirement is met.

One way to integrate intelligent network functions into the GPRS network is to arrange the nodes SGSN (11) and GGSN (12) of the GPRS system to function as intelligent network switching points SSP. A switching point SSP provides the service switching function SSF. The service control point SCP, or a similar physical entity, providing the service control function SCF 14 and 15 is usually a separate functional unit.

Intelligent network components are interconnected via a signalling network conforming to the signalling system number 7 (SS7, Signalling System Number 7 is a well-known signalling system described in the recommendations of the CCITT (now the ITU-T)). When communicating with each other, intelligent network components use, for example, the INAP protocol (Intelligent Network Application Protocol described in the ETSI (European Telecommunications Institute) standard ETSI IN CS1 INAP Part 1: Protocol Specification, prETS 300 374-1). In the SS7 protocol stack the INAP layer is the topmost layer, situated on top of a TCAP layer (Transaction Capabilities Application Part), an SCCP layer (Signalling Connection Control Point) and an MTP layer (Message Transfer Part). In the GSM and the GPRS, components communicate using for example a CAP protocol GSM 09.78 or a MAP protocol GSM 09.02.

When the subscriber 10 registers in the GPRS network, i.e. in a GPRS attach procedure, the SGSN 11 creates a mobility management context (MM context) 21 containing information related to the mobility and security of the subscriber 10, for example. In connection with a PDP activation procedure the SGSN 11 creates a PDP context (packet data protocol) 22 and 23 to be used for routing purposes, with the GGSN 12 used by the GPRS subscriber 10, within the GPRS network. The PDP context determines different data transmission parameters, such as PDP type (X.25 or IP, for example), PDP address (X.121 address, for example), Quality of Service QoS and NSAPI.

The GPRS gateway support node GGSN 12 connects the GPRS network to the data networks 13, such as an IP network (the Internet). The GGSN 12 includes the PDP addresses and routing information, i.e. the PDP contexts 24 and 25, of the GPRS subscribers 10. The routing information is used for tunneling protocol data units PDU from the data network 13 to the current switching point of the subscriber 10, i.e. to the serving SGSN 11.

According to the method of the invention, an intelligent network service control function (M-SCF) 14 or another similar mediator unit function is connected to the packet network nodes 11 and 12. From the support nodes 11 and 12 information about different context events 21 to 25 related to the services used by the subscriber 10 is submitted to the mediator unit 14. In an intelligent network application the information provides the service control function SCF with impulses triggering the service. The mediator unit 14 converts in real time the information received from the MM and PDP contexts 21 to 25 by applying the charging algorithms of the network to provide unambiguous charging data expressed as an amount of money spent or as charging pulses, for example. The network-specific charging algorithms may be based, for example, on the duration of the service used, the amount of data transferred and the quality of service. In addition, the charging algorithm may be subscriber-specific, in which case it can be loaded to the mediator unit 14, when necessary, from the home network of the subscriber 10 in connection with location updating, for example. The subscriber-specific charging algorithm can also exchange information with the charging algorithm of a visited network or with another corresponding service responsible for the determining of mediator unit charging. The determining of the charging of a connection established to a selected number, for example, can be advantageously left at the mediator unit's responsibility because the visited network knows the charging principles of the addresses in its area, for example. Alternatively, if the packet network is provided with a charging gateway functionality CGF (not shown), the mediator unit 14 is advantageously located in association with the CGF; it thus receives the CDR data coming from the support nodes 11 and 12 and filtered by the CGF. Also in this case the mediator unit 14 converts in real time the information it receives by applying the charging algorithms of the network to provide unambiguous charging data, expressed as an amount of money spent or as charging pulses, for example.

The charging data are forwarded to the subscriber billing entity 15, which is advantageously an intelligent network service control function (H-SCF). The billing unit 15 is located, for example, in the home network of the subscriber 10, in a subscriber identity module (SIM), or in another similar location determined on the basis of subscriber identity. The billing unit 15 can also be located behind an open service architecture (OSA) associated with the GPRS, GSM or UMTS (Universal Mobile Telecommunications System),

whereas the mediator unit 14 is located within the area of a GPRS, GSM or UMTS network, preferably in a CSE (Camel Service Environment) of the home network. The open service architecture provides an entity-based interface for service features that are used for providing services. The open service architecture can be provided either from the CSE or from a server communicating with the CSE for the purpose of providing service features. To implement the service features provided by the open service architecture within the network, the network support nodes are controlled by applying network-specific operations (such as CAP, INAP, MAP, ISUP) typically from the CSE, for example. The open service architecture is defined in the ETSI UMTS recommendation 23.20. The billing unit 15 comprises the account data of the subscriber 10 and it updates the data in real time on the basis of the information it receives from the mediator unit 14. Since the billing unit 15 receives the charging data in an unambiguous form, it does not need to know the charging algorithms of the different packet networks that the subscriber 10 possibly visits.

For prepaid services the billing unit 15 comprises a particular prepayment account into which the subscriber 10 can make a prepayment. The billing unit 15 debits the prepayment account, on the basis of the information it has received from the mediator unit 14, with the amount of the prepaid services used by the subscriber 10. If the amount of money in the prepayment account has been exhausted, the billing unit 15 informs this to the packet network which prevents the subscriber from using the services for example by deactivating the contexts 21 to 25 of the subscriber 10 in the support nodes 11 and 12.

In another alternative for performing charging when prepaid services are used the mediator unit 14 requests the billing unit 15 to place a predetermined amount of the money in the prepayment account at its disposal and from the sum it receives, the mediator unit 14 then subtracts the amount corresponding to the services used by the subscriber 10. If the subscriber stops using a service, thereby deactivating for example the MM or PDP context 21 to 25, the corresponding amount of money that is left is transferred back into the prepayment account at the billing unit 15. On the other hand, if the amount of money transferred to the mediator unit 14 is exhausted, the mediator unit 14 requests a new sum from the billing unit 15. If the prepayment account at the billing unit 15 is exhausted, and a new sum cannot be

transferred from the billing unit 15 to the mediator unit 14, the subscriber 10 is prevented from using the services.

When prepaid services are charged for, a certain amount of credit may also be accepted. In this case the subscriber 10 can use the services
5 even after the prepayment has been exhausted.

In a preferred embodiment of the invention a first context event fulfilling the trigger conditions and associated with a session of the subscriber 10 or with a particular context 21 to 25 of a session of the subscriber 10 triggers the intelligent network service in the service control function 14 acting
10 as the mediator unit function. The service control function 14 acting as the mediator unit function determines the charging algorithm to be applied. The charging algorithm provides the context events that are significant for charging. After the charging algorithm has been determined the mediator unit function 14 informs the support node 11 or 12 the context events it is
15 interested in and requests a report of the events. The report is recurrently provided on the events concerned in association with one and the same session or context 21 to 25, without a separate request, for as long as the context 21 to 25 or the session is active. In another preferred embodiment of the invention the mediator unit function 14 triggers an intelligent network
20 service in the billing entity 15 when a first intelligent network service of a particular subscriber 10 at a particular moment is triggered in the mediator unit function by a context event. The intelligent network service initiated in the billing entity 15 as a result of the triggering then checks the account of the subscriber 10 and if there is no money left in the account, it deactivates the
25 context 21 to 25 that performed the triggering and prevents the generating of new contexts 21 to 25.

In another preferred embodiment of the invention, the context 21 to 25 that performed the triggering is deactivated by submitting a deactivation request from the service control function 15 to the support node 11 or 12,
30 either via the mediator unit function 14 or directly. In yet another preferred embodiment of the invention the context 21 to 25 that performed the triggering is deactivated and the activation of new contexts is prevented by submitting a request for the deactivation of the contexts 21 to 25 to the home location register (HLR, not shown), the contexts 21 to 25 then being deactivated and
35 the activation of new contexts prevented via the HLR in accordance with GPRS recommendations.

In another preferred embodiment of the invention the billing entity 15 submits part of the sum prepaid by the subscriber 10 to the mediator unit function 14 when an intelligent network service associated with the subscriber 10 in question is triggered in the billing entity function.

5 According to yet another preferred embodiment of the invention, an IP protocol stack (Internet Protocol) is used at an interface 42 between the mediator unit 14 and the support node 11 and 12, and an SS7 protocol stack at an interface 41 between the mediator unit 14 and the billing unit 15. The interface 42 between the mediator unit 14 and the support node 11 and 12 is
10 advantageously based on CORBA architecture (Common Object Request Broker Architecture) or on another entity-based distributed architecture. CORBA is an architecture defined by Object Management Group. To put it simply, CORBA allows applications to communicate with each other
15 irrespective of where the applications are located or who designed them. It is an architecture that provides a rough basis for open environments based on standards and capable of growing as the operator's requirements increase.

Figure 2 shows the operation of the invention in a circuit-switched GSM mobile communication network. It is apparent that the circuit-switched network can also be implemented by using fixed connections, for example.
20 The network comprises a base station subsystem (BSS) 112. The BSS 112 and subscribers 110 communicate over radio connections 131. In the base station subsystem 112 each cell is served by a base station (BTS) 116. A number of base stations 116 are connected to a base station controller (BSC) 117, the function of which is to control radio frequencies and channels used by
25 the BTS 116. The BSC 117 is connected to a mobile services switching centre (MSC) 111. The MSC in turn is connected to other telecommunications networks, such as the public telephone network (PSTN) 113. The Figure only shows network elements that are necessary for the understanding of the invention. The number of network elements may be arbitrary.

30 The operation of the invention in a circuit-switched network basically corresponds to the above described operation of the invention in a packet-switched network. The network element, or node, corresponding to the support node 11 and 12 and providing event data for charging is the mobile services switching centre (MSC) 111, for example. The mobile services switching
35 centre 111 comprises a basic call state model (BCSM) 121, which describes the different phases of call control. The mobile services switching centre 111 is

advantageously associated with an intelligent network switching point SSP, the data related to a session of a subscriber 110 or to a particular state model 121 of a session of the subscriber 110 then providing impulses for the service control function SCF and triggering the intelligent network service in the service control function 114 acting as the mediator unit function. The operation of the mediator unit 114 corresponds to that of the mediator unit 14 described in connection with the packet-switched network. Similarly, the operation of a billing unit 115 corresponds to that of the billing unit 15 described above in connection with the packet network. According to a preferred embodiment of the invention, an IP protocol stack (Internet Protocol) is used at an interface 142 between the mediator unit 114 and the node 111 and, further, an SS7 protocol stack at an interface 141 between the mediator unit 114 and the billing unit 115. The interface 142 between the mediator unit 114 and the node 111 is advantageously based on the CORBA architecture or on another entity-based, distributed architecture.

The mediator unit 114 can be located in the node 111, or as a separate unit. Several mediator units may be used: for example, when a call is transmitted via several nodes 111, a separate mediator unit 114 is provided for each node 111 or, alternatively, several nodes 111 use one and the same mediator unit 114. A plurality of nodes 111 may be associated with a call of the subscriber 110 when the subscriber 110 moves within a visited network area, for example, where the subscriber 110 is served by a visited network centre VMSC (not shown), which comprises a mobile services switching centre MSC and a visitor location register VLR (VMSC = VLR + MSC), the call being forwarded from the VMSC to a gateway mobile services switching centre GMSC (not shown) which is connected to other telecommunications networks, such as the public telephone network PSTN, and which comprises gateway functionality for calls entering and leaving the networks.

It is apparent to a person skilled in the art that as technology advances the basic idea of the invention can be implemented in various different ways. The invention and its embodiments are therefore not limited to the above described examples, but they may vary within the scope of the claims.

CLAIMS

1. A method for charging a subscriber in a telecommunications network comprising nodes connected to a mediator unit, whereby a billing unit comprising the subscriber's charging data can be located outside the network used, preferably within the subscriber's home network, in a subscriber identity module (SIM) or behind an open service architecture (OSA) connected to the network, the method comprising the steps of
- 5 noting in the nodes the event data associated with the services used by the subscriber and
- 10 reporting the event data to the mediator unit, **characterized** by
- converting substantially in real time the event data in the mediator unit according to network charging algorithms to provide a charging data format understandable to the billing unit, expressed preferably as an amount
- 15 of money spent or as charging pulses, for the updating of the subscriber's charging data between the mediator unit and the billing unit.
2. A method according to claim 1, **characterized** in that the network charging algorithm used in the mediator unit is, in addition, subscriber-specific.
- 20 3. A method according to claim 1 or 2, **characterized** in that the mediator unit is located in connection with a charging gateway functionality (CGF), the event data being transferred to the mediator unit via the charging gateway functionality.
4. A method according to claim 1, 2 or 3, **characterized** in
- 25 that the mediator unit is implemented by using the intelligent network (IN) service control function (M-SCF) associated with the telecommunications network nodes, in which case the reported event data act as service triggers or they are reported at the request of the service control function (M-SCF).
5. A method according to claim 1, 2, 3 or 4, **characterized** in
- 30 that the billing unit is implemented by using the intelligent network (IN) service control function (H-SCF), in which case the mediator unit triggers the service.
6. A method according to any one of claims 1 to 5, **characterized** in that the charging data is transferred from the mediator unit to the billing unit for updating of the charging data.
- 35 7. A method according to claim 6, **characterized** in that if the service used by the subscriber is a prepaid service and the billing unit

comprises the data on the prepayment made by the subscriber, i.e. a prepayment account balance,

a sum corresponding to the charging data transferred to the billing unit is subtracted at the billing unit from the prepayment account and

5 the service used by the subscriber is terminated when the prepayment account balance is zero or negative.

8. A method according to any one of claims 1 to 5, **characterized** in that if the service used by the subscriber is a prepaid service and the billing unit comprises the data on the prepayment made by the subscriber, i.e. a prepayment account balance,

10 a predetermined amount of money is transferred from the prepayment account at the billing unit to the mediator unit,

in the mediator unit, a sum corresponding to the charging data is subtracted from the transferred amount.

15 9. A method according to claim 8, **characterized** in that when the subscriber stops using a service,

the amount of money remaining from the transferred sum in the mediator unit is transferred back to the prepayment account at the billing unit.

20 10. A method according to claim 8 or 9, **characterized** in that when the sum transferred to the mediator unit is exhausted,

a new sum is transferred from the prepayment account at the billing unit to the mediator unit, or

the service used by the subscriber is terminated if the prepayment account balance at the billing unit is zero or negative.

25 11. A billing system associated with a telecommunications network, the network comprising nodes (11 and 12; 111), the nodes (11 and 12; 111) being arranged to note the event data associated with the services used by a subscriber (10; 110), the system comprising

30 a billing unit (15; 115) which comprises the subscriber's (10; 110) charging data and which is preferably located in the subscriber's (10; 110) home network or in a subscriber identity module (SIM) and

a mediator unit (14; 114) connected to the nodes (11 and 12), the nodes (11 and 12, 111) being arranged to report the event data to the mediator unit (14; 114), **characterized** in that

35 the mediator unit (14; 114) is arranged to convert substantially in real time the generated event data on the basis of network charging algorithms

into a charging data format understandable to the billing unit (15; 115), expressed preferably as an amount of money spent or as charging pulses, for the updating of the charging data between the mediator unit (14; 114) and the billing unit (15; 115).

5 12. A system according to claim 11, **characterized** in that the network charging algorithm used in the mediator unit (14; 114) is, in addition, subscriber-specific.

10 13. A system according to claim 11 or 12, **characterized** in that the mediator unit (14; 114) is located in connection with a charging gateway functionality (CGF), the event data being transferred to the mediator unit (14; 114) via the charging gateway functionality.

15 14. A system according to claim 11 or 12, **characterized** in that the mediator unit (14; 114) is located in the CSE (Camel Service Environment) of the home network and the billing unit (15; 115) is located behind an open service architecture (OSA) associated with the network.

20 15. A system according to claim 11, 12, 13 or 14, **characterized** in that the mediator unit (14; 114) is implemented by using an intelligent network (IN) service control function (M-SCF) associated with the telecommunications network nodes, in which case the reported event data act as service triggers or the data are reported at the request of the service control function (M-SCF).

25 16. A system according to claim 15, **characterized** in that an IP protocol stack is used at the interface (42; 142) between the mediator unit (14; 114) and the node (11 and 12; 111) and that the interface (42; 142) is preferably based on CORBA architecture.

 17. A system according to any one of claims 11 to 16, **characterized** in that the billing unit (15; 115) is implemented by using the intelligent network (IN) service control function (H-SCF), the mediator unit (14; 114) triggering the service.

30 18. A system according to claim 17, **characterized** in that an SS7 protocol stack is used at the interface (41; 141) between the mediator unit (14; 114) and the billing unit (15; 115).

35 19. A system according to any one of claims 11 to 18, **characterized** in that the mediator unit (14; 114) is arranged to transfer the charging data corresponding to the services used by the subscriber (10;

110) to the billing unit (15; 115) for the updating of the charging data of the subscriber (10; 110).

20. A system according to claim 19, **characterized** in that if the service used by the subscriber (10; 110) is a prepaid service and the billing unit (15; 115) comprises data on the prepayment made by the subscriber (10; 110), i.e. a prepayment account balance, the equipment is arranged to

subtract from the prepayment account a sum corresponding to the service charging data transferred to the billing unit (15; 115) and to

terminate the service used by the subscriber (10; 110) when the prepayment account balance is zero or negative.

21. A system according to any one of claims 11 to 18, **characterized** in that if the service used by the subscriber (10; 110) is a prepaid service and the billing unit (15; 115) comprises data on the prepayment made by the subscriber (10; 110), i.e. a prepayment account balance, the equipment is arranged to

transfer a predetermined amount of money from the prepayment account at the billing unit (15; 115) to the mediator unit (14; 114) and to

subtract in the mediator unit (14; 114) a sum corresponding to the charging data from the transferred amount.

22. A system according to claim 21, **characterized** in that when the subscriber (10; 110) stops using the service, the equipment is arranged to

transfer the amount of money remaining from the transferred sum in the mediator unit (14; 114) back to the prepayment account at the billing unit (15; 115).

23. A system according to claim 21 or 22, **characterized** in that when the sum transferred to the mediator unit (14; 114) is exhausted, the equipment is arranged to

transfer a new sum from the prepayment account at the billing unit (15; 115) to the mediator unit (14; 114) or to

terminate the service used by the subscriber (10; 110) if the prepayment account balance at the billing unit (15; 115) is zero or negative.

1/1

Fig. 1


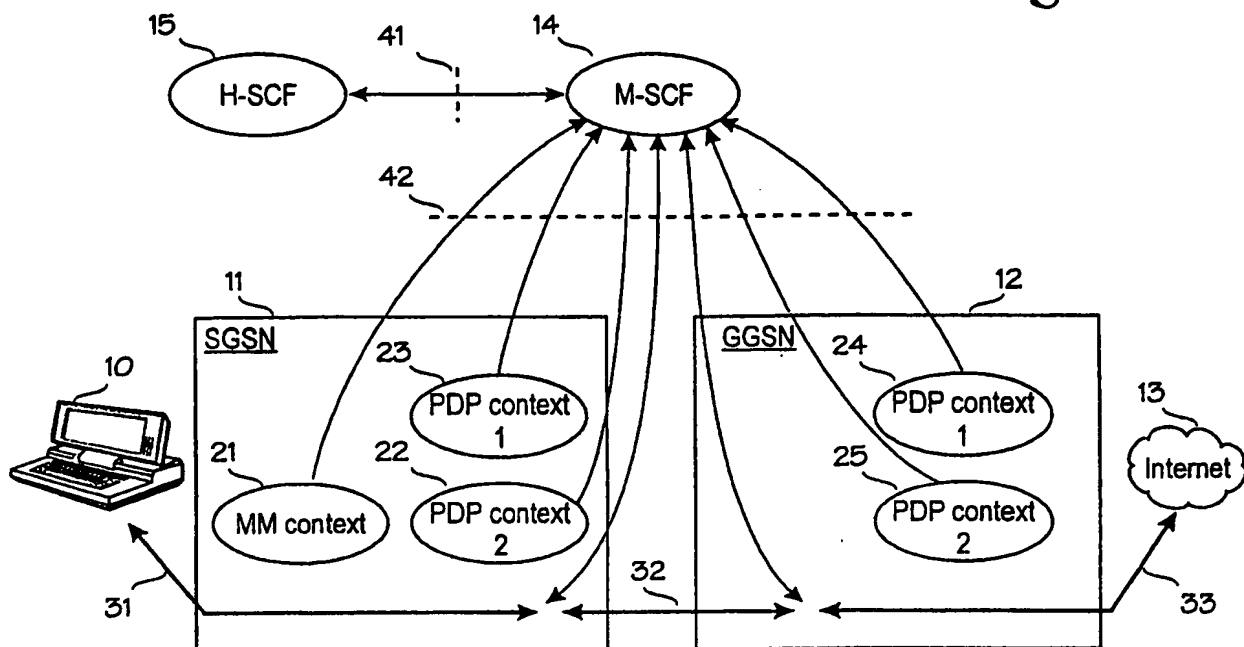


Fig. 2

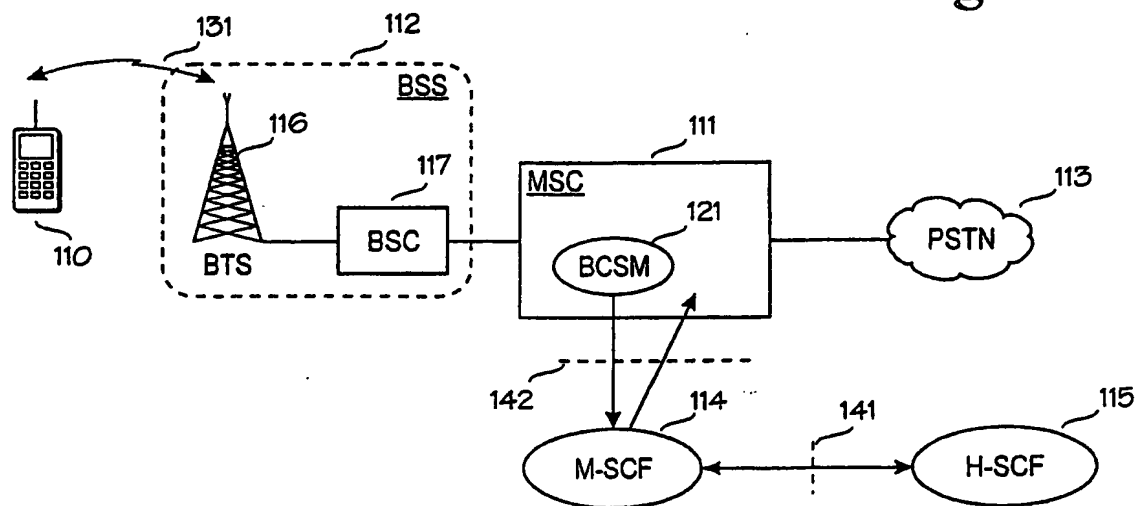

1
INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00858

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04L 12/14, H04Q 7/34 // H04M 15/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L, H04Q, H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9726739 A1 (NOKIA TELECOMMUNICATIONS OY), 24 July 1997 (24.07.97), page 2, line 14 - page 4, line 13; page 9, line 4 - page 11, line 18, figure 1, claims 1-10 --	1-23
A	WO 9723100 A2 (ERICSSON INC.), 26 June 1997 (26.06.97), page 3, line 22 - page 4, line 19; page 23, line 29 - page 24, line 11; page 24, line 23 - page 25, line 3, figures 4,10,11,12, claims 1-19, page 26, line 6 - page 28, line 14 --	1-23



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "B" earlier document but published on or after the international filing date
- "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 March 2000

Date of mailing of the international search report

14 -03- 2000

Name and mailing address of the ISA /

Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Erik Johannesson/CL
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00858

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9615616 A2 (TELECOM FINLAND OY), 23 May 1996 (23.05.96), page 7, line 16 - line 30; page 8, line 14 - line 35; page 12, line 19 - page 13, line 10, figures 2,3,4, claims 1-16, page 14, line 32 - page 17, line 2; page 20, line 27 - page 21, line 5 --	1-23
A	WO 9636192 A1 (OY NOKIA AB), 14 November 1996 (14.11.96), abstract --	1-23
A	WO 9522230 A2 (TELEFONAKTIEBOLAGET LM ERICSSON), 17 August 1995 (17.08.95), abstract --	1-23
A	WO 9730543 A1 (TELECOM FINLAND OY), 21 August 1997 (21.08.97), abstract -- -----	1-23

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/12/99

International application No.
PCT/FI 99/00858

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9726739 A1	24/07/97	AU 1445897 A	11/08/97
		EP 0875108 A	04/11/98
		FI 2482 U	19/06/96
		FI 102232 B	00/00/00
		FI 960185 A,V	16/07/97
WO 9723100 A2	26/06/97	AU 1349197 A	14/07/97
		CN 1209251 A	24/02/99
		EP 0868820 A	07/10/98
		US 5875238 A	23/02/99
WO 9615616 A2	23/05/96	AU 3873195 A	06/06/96
		EP 0792551 A	03/09/97
		FI 945346 A	15/05/96
WO 9636192 A1	14/11/96	AU 5650396 A	29/11/96
		FI 100631 B	00/00/00
		FI 952212 A	09/11/96
WO 9522230 A2	17/08/95	AU 679841 B	10/07/97
		AU 1721795 A	29/08/95
		CN 1124556 A	12/06/96
		DE 69509828 D,T	07/10/99
		EP 0692174 A,B	17/01/96
		SE 0692174 T3	
		EP 0895398 A	03/02/99
		ES 2134442 T	01/10/99
		FI 954659 A	29/09/95
		JP 9504150 T	22/04/97
		SG 49240 A	18/05/98
		US 5781855 A	14/07/98
WO 9730543 A1	21/08/97	AU 1605097 A	02/09/97
		EP 0885518 A	23/12/98
		FI 101664 B	00/00/00
		FI 960746 A	20/08/97

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.